




# TECHNICAL CERTIFICATE

## MORZH (The Walrus)

Tent-sauna, fisherman tent, winter tent.

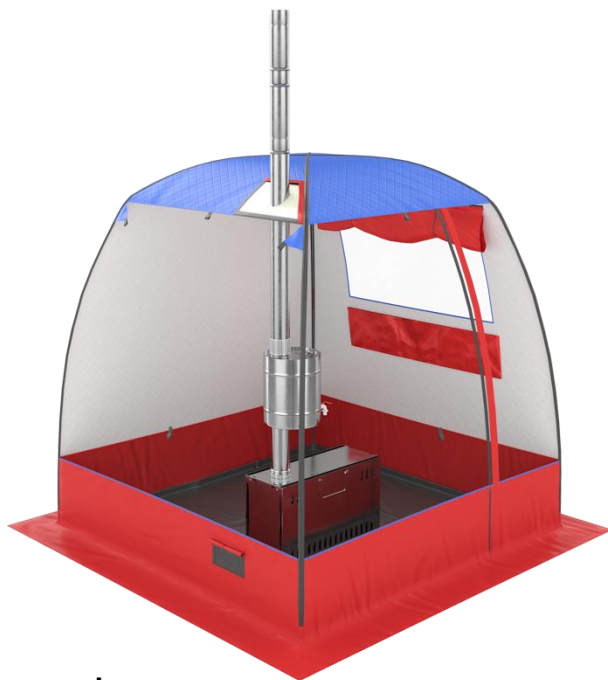

<https://morzh.eu>

## Description, purpose

MORZH tent sauna – universal tent, can be used as a winter tent for living, fishing, hunting.

### Specifications:

Options	MORZH
Length, m	2,05
Width, m	2,05
Sidewall height, m	1,7
Center height, m	1,95
Effective area, m <sup>2</sup>	4,1
Tent weight, kg	8.3
Number of berths	1
Kind, dimensions of package	1 bag 60*35*25 cm

### Equipment:

1. Frame arc - 2 pcs.
2. Tent awning - 1 pc.
3. Carrying bag - 1 pc.
4. Frame pouch - 1 pc.
5. Set of wind braces (6x3 m) - 1 pc.
6. SPTA (piece of cloth) - 1 pc.
7. Hanging net for storage and drying things (weight limit: no more than 5 kg) - 1 pc.
8. Technical certificate - 1 pc.

The frame of the tent consists of two equal arcs, each consisting of 10 segments connected by an elastic band, preventing the disintegration of pipes. The material of pipes is D16t aluminium alloy with 12 mm diameter, 1.5 mm thickness. Adapters for connecting equal segments of the frame are made of D16 pipes 16 mm in diameter.

The tent is made of 3-layer quilted fabric consisting of Oxford 240 / heater 80 g / m<sup>2</sup> / Taffeta 210 RipStop.

The top of the tent is made of polyester fabric Oxford 240 with water-repellent impregnation, the inner tent is made of light synthetic Taffeta fabric with


reinforcing rip-stop braiding. Between the two layers there is a heater made of Siberia synthetic cloth, density of 80 gr / m<sup>2</sup>. The lower part of the tent is made of Oxford fabric 240 with a special water-repellent impregnation. The canvases are quilted by a thermo-stitch.

There is a cutting for the chimney in the tent, made of stainless steel and a special fiberglass with a silicone double-sided coating.

### **Functional equipment**

The entrance is equipped with zippers for easy and quick access to the tent.

One of the walls has a window made of transparent film. The tent includes pockets and a net for storing and drying things.

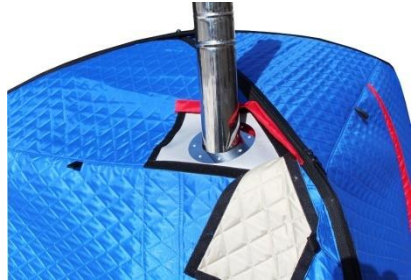

The chimney section is made of stainless steel and special fiberglass with a silicone double sided coating, designed for stove with 90 mm chimney diameter. To install stove with a smaller diameter of the chimney, it is recommended to use an adapter ring. There is a ventilation window for the air to reach the stove. The window has a mosquito net.

### **Assembly order**

The assembly of the tent should begin with the installation of the frame arcs into the pockets, which are located at the corners of the tent. After installing the frames in pockets, you need to close the zipper to hold the frame inside. After the assembly, you should cut the supplied guy rope into pieces and be sure to install all the wind guys! They are needed to keep the tent firmly in the wind, and also so that the stove does not touch the tent wall. Before installing the stove, be sure to open the valve closing the chimney section. The valve opens downward and is secured with a Velcro tape on the corner brace.

### **Precautionary measures**

- Carefully fix the tent on the ground in order to avoid overturning
- Do not use a stove and other heating devices in the tent with wind more than 10 m/s
- It is not recommended to install a tent close to the crowns of trees, other tents.
- Do not allow intoxicated persons and young children use the tent alone.

- Do not use the gas and flammable substances to ignite the stove.

### Rules of operation

The product can be used in temperature modes from -40C to +40C. The installation of all wind braces required. Be sure to observe all safety precautions when installing the stove. Do not install the stove close to the wall of the tent. Use stoves with a spark arrestor. Clean the chimney from soot during prolonged living and use. If there is a warm floor, it is not necessary in sauna mode.

### Storage and transportation

The tent should be kept dry. It is recommended to dry the tent after each use. Shake out the sand and leaves from the tent after each use. Clean the tent from dirt with a soft cloth or sponge and soap. Do not use strong chemical cleaners. Never wash the tent in a washing machine and do not iron it. When there are tears, try to glue or sew them as soon as possible. Always try to fold the awning with polyurethane coating inside. Arcs and pegs should be stored in special cases, otherwise they can damage the tent.

### Warranty card

Technical control department date: « \_\_\_\_ » \_\_\_\_\_ 20 .

Name: \_\_\_\_\_

Color \_\_\_\_\_ Windows \_\_\_\_\_

Date of sale: « \_\_\_\_ » \_\_\_\_\_ 20 .

Buyer's signature: \_\_\_\_\_ / \_\_\_\_\_

### Manufactured to order:

New Solution LLC,

620043, Cherklasskaya str. 9, Ekaterinburg, Russia

<https://morzh.eu>

1-888-927-44-78



# Tent Sauna MORZH (WALRUS). LUX Version



LUX models are equipped with a convenient hinged door with a protective valve. This valve lets you open and close the door quickly. It also protects from precipitation and reduces heat loss. The valve can be easily closed both from the outside and from the inside of the tent.

For greater tightness, the door is additionally equipped with a zip fastener along the door.

**\* Important!** A separate frame is provided for the LUX hinged door. Frame ends must be inserted into the special pockets that are located at the top and bottom of the door. Make sure that the end of the arc fully enters the pocket (see picture), and not into the area behind it. Then fasten the zipper. The picture shows the right installation.



**Manufactured by order:** New Solution LLC,  
INN 6658182671, KPP 665801001,  
620043, Sverdlovsk region, Yekaterinburg,  
Cherlasskaya str. 9/1  
Tel.: 1-888-927-44-78  
<https://morzh.eu>

